


# 5C908

rev	description	date	appr
A	Initial Release	2/16/11	SH
B	Change J2 to 5-pin	3/07/11	SH
C	Add CalAmp connector PNs to BOM	4/12/11	SH

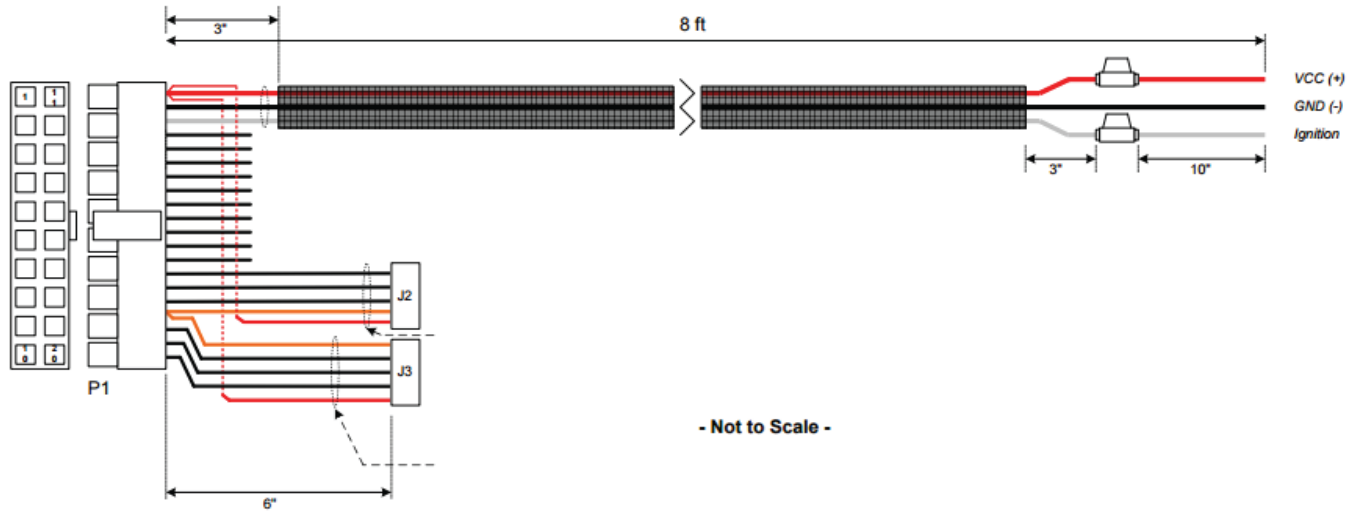

- Not to Scale -

Connection Table

P1	signal description	color	fly	J2	J3	P1	signal description	color	fly	J2	J3
1	GROUND	black	-	3	-	11	OUTPUT 2	yellow	x	-	-
2	OUTPUT 0	green	x	-	-	12	INPUT 2	orange	x	-	-
3	INPUT 1	blue	x	-	-	13	AUX_1 Serial Out	green	-	5	-
4	AUX_1 Serial In	blue	-	4	-	14	Primary VCC Input	red	X	1	1
5	ADC1 INPUT	pink	x	-	-	15	Primary GROUND	black	X	-	-
6	INPUT 3	violet	x	-	-	16	GROUND	black	x	-	-
7	INPUT 4 (/OUT_3)	gray	x	-	-	17	1-WIRE DATA	white/blue	x	-	-
8	INPUT 0	white	X	-	-	18	AUX_2 Serial Out	white/orange	-	-	5
9	VDD (3V OUT)	orange	-	2	2	19	GROUND	black	-	-	3
10	OUTPUT 1	brown	x	-	-	20	AUX_2 Serial In	white/yellow	-	-	4